



To order : Tel 035927550


Fax 035927689

E-mail

com@elteguarnizioni.com



PISTON SEALS - SET E05.....

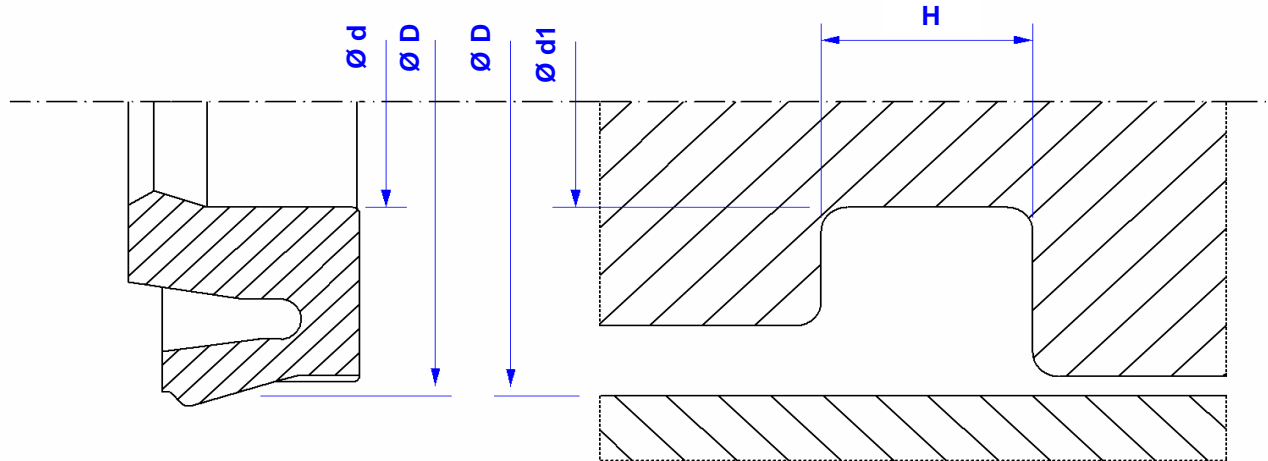

CODE	D	d	H	d1
E05N032024	32	24	6	31
E05N040030	40	30	7,5	38,5
E05N050040	50	40	7,5	48,5
E05N063053	63	53	7,5	61,5
E05N080068	80	68	9,5	78
E05N100088	100	88	9,5	98
E05N125110	125	110	11	122,5

DUTY

Seals for pneumatic cylinders, thanks to their particular static lip design are tight fit into their housing.

SET

E05..... set is produced with nitrilic rubber (NBR) or fluoroelastomer (FPM) low friction compound to operate even with a little lubrication.

RANGE OF APPLICATION

NBR COMPOUND

Temperature from - 15°C up to + 80°C
 Pressure max ≤ 10 bar
 Speed ≤ 1 m/s

FPM COMPOUND

Temperature from - 10°C up to + 150
 Pressure max ≤ 10 bar
 Speed ≤ 1 m/s